

# Fireplace BLANKA 8 tile cream

BLANKA/KAFEL/K

EAN:

5901350058626

The insert with tile panels presents new face of inserts which will fit both for stylish and modern interiors.



## Technical Specifications

Rated output (kW)	8,0
Range of heating power (kW)	7.5 - 11.0
Efficiency (%)	78,0
Exhaust outlet diameter (mm)	160
Complies with Ecodesign criteria	Yes
Designed for heat recovery unit	No
Fuel type	recommended seasoned hardwood with moisture $\leq 20\%$
Weight (kg)	247,0
CO emission (at 13% O <sub>2</sub> ) $\leq$ given in %	0,10
Flue gas temperature (°C)	285,0
Max log length (cm)	30
Emission of dust (mg/Nm <sup>3</sup> )	36,0
Compliance with BlmSchV 2 standard	Yes
The energy efficiency index EEI	102,79
Glazing type	straight
Opening of the doors	to the left

Material	steel, tile
Width (cm)	71,50
Height (cm)	136,50
Depth (cm)	59,80
External air inlet	Yes
The liner of the combustion chamber	Yes
Ashpan	Yes
Decorative printed glass	No

## Features

---

### MAXIMUM USE OF ENERGY

The body and the front of the insert are resistant to high temperatures thanks to the high quality steel used in production.

Efficient burning process & maintaining of temperature to keep the warmth for longer thanks to lining of combustion chamber with Acumotte - heat accumulating material which raises the temperature in the combustion chamber.

Combustion of fuel particles thanks to deflector, which extends the exhaust gas path.

Built-in fi 100 external air intake which provides air supply from the outside directly into the hearth which results in better combustion and better comfort of usage.

Reducing emissions of harmful CO to the atmosphere by regulating of secondary air supply.

Maximum usage of heat thanks to densely spaced radiators.

### ECOLOGICAL COMBUSTION

The unit meets the requirements of **Ecodesign** standards and the restrictions of the **BImSchV 2** standard, which determines the maximum CO emission.

### SAFETY AT THE HIGHEST LEVEL

Perfect tightness thanks to the solid welds made in a noble gas shielding.

All steel elements are laser cut and bent on CNC bending machines.

Insert's front equipped with a heat resistant ceramics that withstands temperatures up to 800oC.

### CONVENIENT TO USE

An elegant and comfortable handle.

It can be used in a various mounting conditions thanks to adjustable legs and movable fumes outlet with 360 regulation.

## DESIGN


Design referring to retro style - glossy tile panels. The casing from tile panels effects for prolonged heat rejection, which provides additional source of heating after extinction.

5 year warranty.

Stoves with tile panels produced by Kratki company are classified as solid-fuel boiler with manual loading of fuel and lockable door. They are used as additional source of heating in interiors where they are installed.

## Technical drawing

---

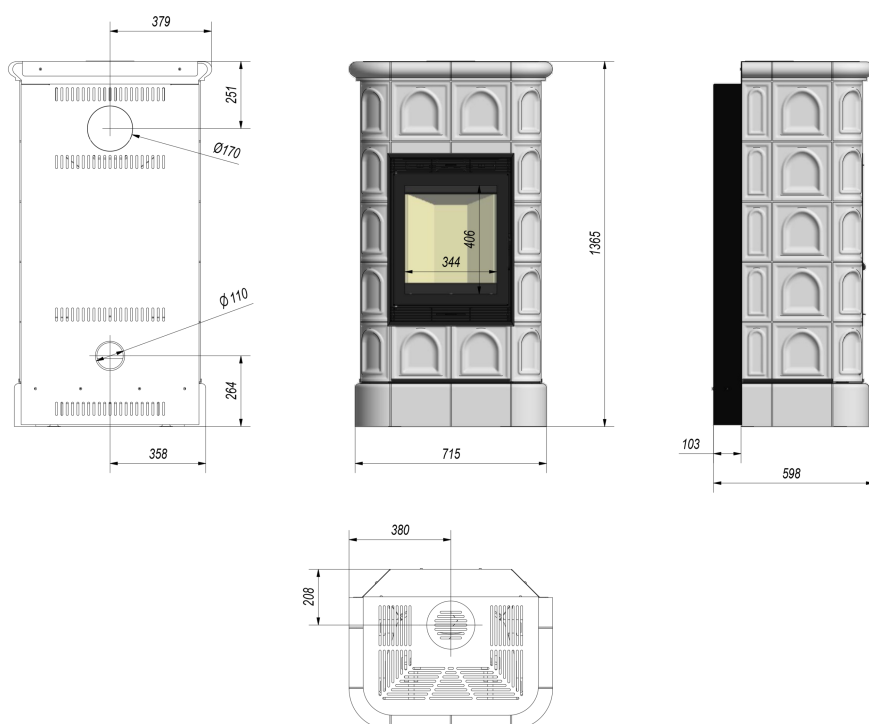

## Additional options

---



### Steel pipe 160/1m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.

93,00 zł



### Steel pipe 160/0.5m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.

61,00 zł



### Movable elbow 160/90

93,00 zł

Adjustable elbow up to 90°, 3-segment, diameter: 160 mm.



### The passage from the pipe system

119,00 zł

Ø 160

The passage from the pipe system to the ceramic chimney Ø160.

## Warranty

---

Wszystkie produkty dostępne na [www.kratki.com](http://www.kratki.com) są fabrycznie nowe, wolne od wad fizycznych i prawnych oraz zostały legalnie wprowadzone na rynek polski. Producent udziela 5 lat gwarancji od momentu zakupu wkładu na jego sprawne działanie. Wyłożenie ceramiczne objęte jest gwarancją na okres 2 lat od momentu zakupu wkładu. Ruszt i uszczelnienia kominka objęte są gwarancją na okres 1 roku od momentu zakupu wkładu. Gwarancją nie jest objęta: ceramika żaroodporna. Zastosowanie wkładu kominkowego, sposób podłączenia do komina oraz warunki eksploatacji muszą być zgodne z instrukcją obsługi.

## Return

---

Klient będący Konsumentem, który zawarł Umowę sprzedaży, może w terminie 14 dni odstąpić od niej bez podawania przyczyny. Bieg terminu na odstąpienie od Umowy sprzedaży rozpoczyna się od chwili objęcia Towaru w posiadanie przez Klienta lub wskazaną przez niego osobę trzecią inną niż przewoźnik. Oświadczenie można złożyć na formularzu, którego wzór został zamieszczony przez Sprzedawcę na Stronie Internetowej Sklepu pod adresem: **formularz odstąpienia**.



**Kratki.pl Marek Bal**  
ul. W. Gombrowicza 4  
26-660 Wsola/Jedlińsk

**www.kratki.com**  
+48 48 338 44 88

Date of publication:  
06.11.2018