

Fireplace BLANKA 8 tile black BLANKA/KAFEL/C

EAN:

5903950040162

The insert covered with tiles, presents a new design that will fit both stylish and modern interiors.



Technical Specifications

Rated output (kW)	8,0
Range of heating power (kW)	7.5 - 11.0
Efficiency (%)	78,0
Exhaust outlet diameter (mm)	160
Complies with Ecodesign criteria	Yes
Designed for heat recovery unit	No
Fuel type	recommended seasoned hardwood with moisture $\leq 20\%$
Weight (kg)	247,0
CO emission (at 13% O ₂) \leq given in %	0,10
Flue gas temperature (°C)	285,0
Max log length (cm)	30
Emission of dust (mg/Nm ³)	36,0
Compliance with BlmSchV 2 standard	Yes
The energy efficiency index EEI	102,79
Glazing type	straight
Opening of the doors	to the left
Material	steel, tile
Width (cm)	71,50

Height (cm)	136,50
Depth (cm)	59,80
External air inlet	Yes
The liner of the combustion chamber	Yes
Ashpan	Yes
Decorative printed glass	No

Features

MAXIMUM USE OF ENERGY

The interior of the stove is lined with Acumotte which perfectly contrasts with the stove, giving it a modern look.

Full combustion on the dust thanks to two deflectors which extend the exhaust path. This process increases the efficiency of burning and guarantees better energy use. It also minimizes the emission of harmful substances to the atmosphere. Additionally a diaphragm that functions similarly to the deflector has been installed at the exhaust outlet, which further enhances the effects of the device.

Primary air is supplied to the insert thanks to the built-in 100 mm external air inlet. Insert has a cover plate on the back wall and a hole in its base. This solution prevents from improper usage. Whole mechanism works quietly and without fail.

Maximum use of heat thanks to densely deployed radiators, which guarantees better efficiency of heat transfer to the environment.

ECOLOGICAL COMBUSTION

The unit meets the requirements of **Ecodesign** standards and the restrictions of the **BlmSchV 2** standard, which determines the maximum CO emission.

SAFETY ON THE HIGHEST LEVEL

The body and the front of the stove is resistant to high temperatures through the use of high quality steel. They also ensure the stability of the entire structure.

Blanka is equipped with a heat resistant ceramic withstanding temperatures up to 800°C. We offered by us glass certified quality and safety.

COMFORTABLE USE


Can be used in various mounting conditions, thanks to adjustable feet and adjustable in 360° exhaust flue.

DESIGN

Retro style design - polished tiles. The casing made of the tiles increases the heat transfer time, which is an additional source of heat after the fire is fading in the furnace.

Stoves with tile panels produced by Kratki company are classified as solid-fuel boiler with manual loading of fuel and lockable door. They are used as additional source of heating in interiors where they are installed.

Technical drawing

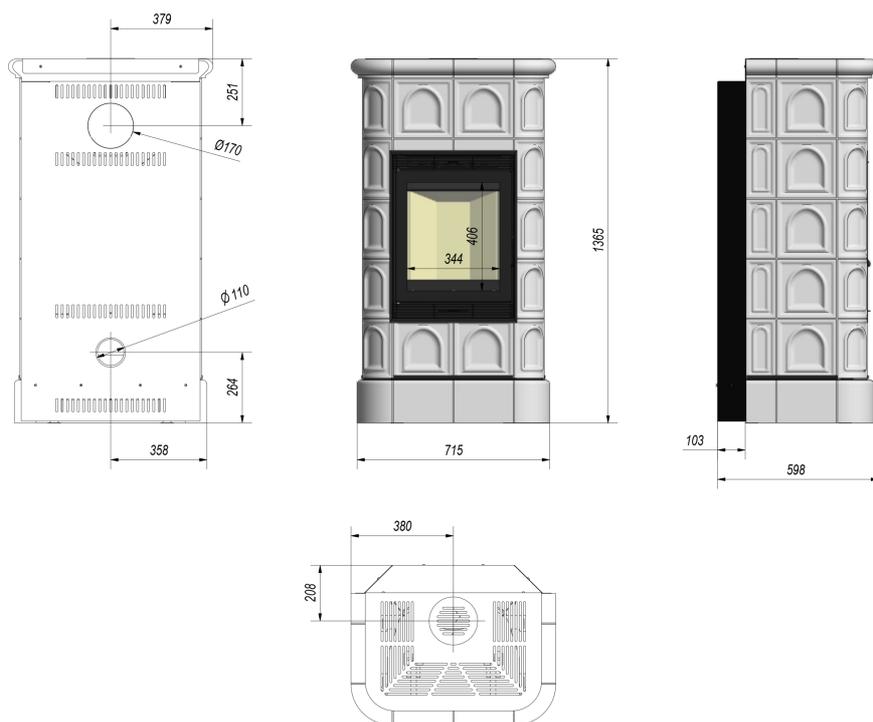

Additional options



Steel pipe 160/1m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.

93,00 zł



Steel pipe 160/0.5m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.

61,00 zł



Movable elbow 160/90

Adjustable elbow up to 90°, 3-segment, diameter: 160 mm.

93,00 zł



The passage from the pipe system

119,00 zł

Ø 160

The passage from the pipe system to the ceramic chimney Ø160.

Warranty

Fireplace BLANKA 8 tile cream - Kratki



Kratki.pl Marek Bal

ul. W. Gombrowicza 4
26-660 Wsola/Jedlińsk

www.kratki.com

+48 48 338 44 88

Date of publication:

06.11.2018